



Service bulletin

C. 206

THE BRITISH MOTOR CORPORATION (AUSTRALIA) PTY. LIMITED

FOR THE ATTENTION OF SERVICE AND PARTS MANAGERS.

STATION WAGON TAILGATE SEALING.

To improve the water and dust sealing at the rear of the Station Wagon the rubber seals detailed overleaf should be used and the fitting instructions hereunder carried out.

All weatherseals required to be glued in position should be secured with a 'Contact' adhesive. The application of this adhesive is to coat both bodywork and sealing rubber with the compound, wait five minutes for the adhesive to 'Tack-Off', then place the seal in the required position. Adhesion is immediate, therefore, care must be taken to position the seals correctly at first.

The approved adhesives and Suppliers are detailed in Service Bulletin GEN. 50.

1. BDH 3783. Rubber-Sealing-Upper Tailgate.
Secure in channel with 'Contact' adhesive and at extremities with two retaining plates BDH 4061, and pop-rivets.
2. BDH 4146. Strip-Rubber-Upper Tailgate.
Secure to the upper tailgate on three sides by 'Contact' adhesive with the thin end of the wedge facing inwards.
3. BDH 3779. Rubber Weatherstrip.
Fit and seal as described in Workshop Manual (Section R)
4. HYB 0743. Weatherseal-Lower-Lower Tailgate Aperture.
Secure with 'Contact' adhesive.
5. HYB 0796. Strip-Rubber-Lower Tailgate.
Secure to three sides with 'Contact' adhesive, thin edge inwards.
6. BDH 4471. Rubber-Sealing-Lower Tailgate.
Secure in retaining channel with 'Contact' adhesive on all four sides

N. Prescott
N. Prescott
Service Manager.

CARS

AUSTIN
FREEWAY
STATION
WAGON

AUSTIN
A60

COUNTRYMAN


MORRIS
OXFORD
V

TRAVELLER

S.

31/8/62

Page 1 of 2
Form TP 1001

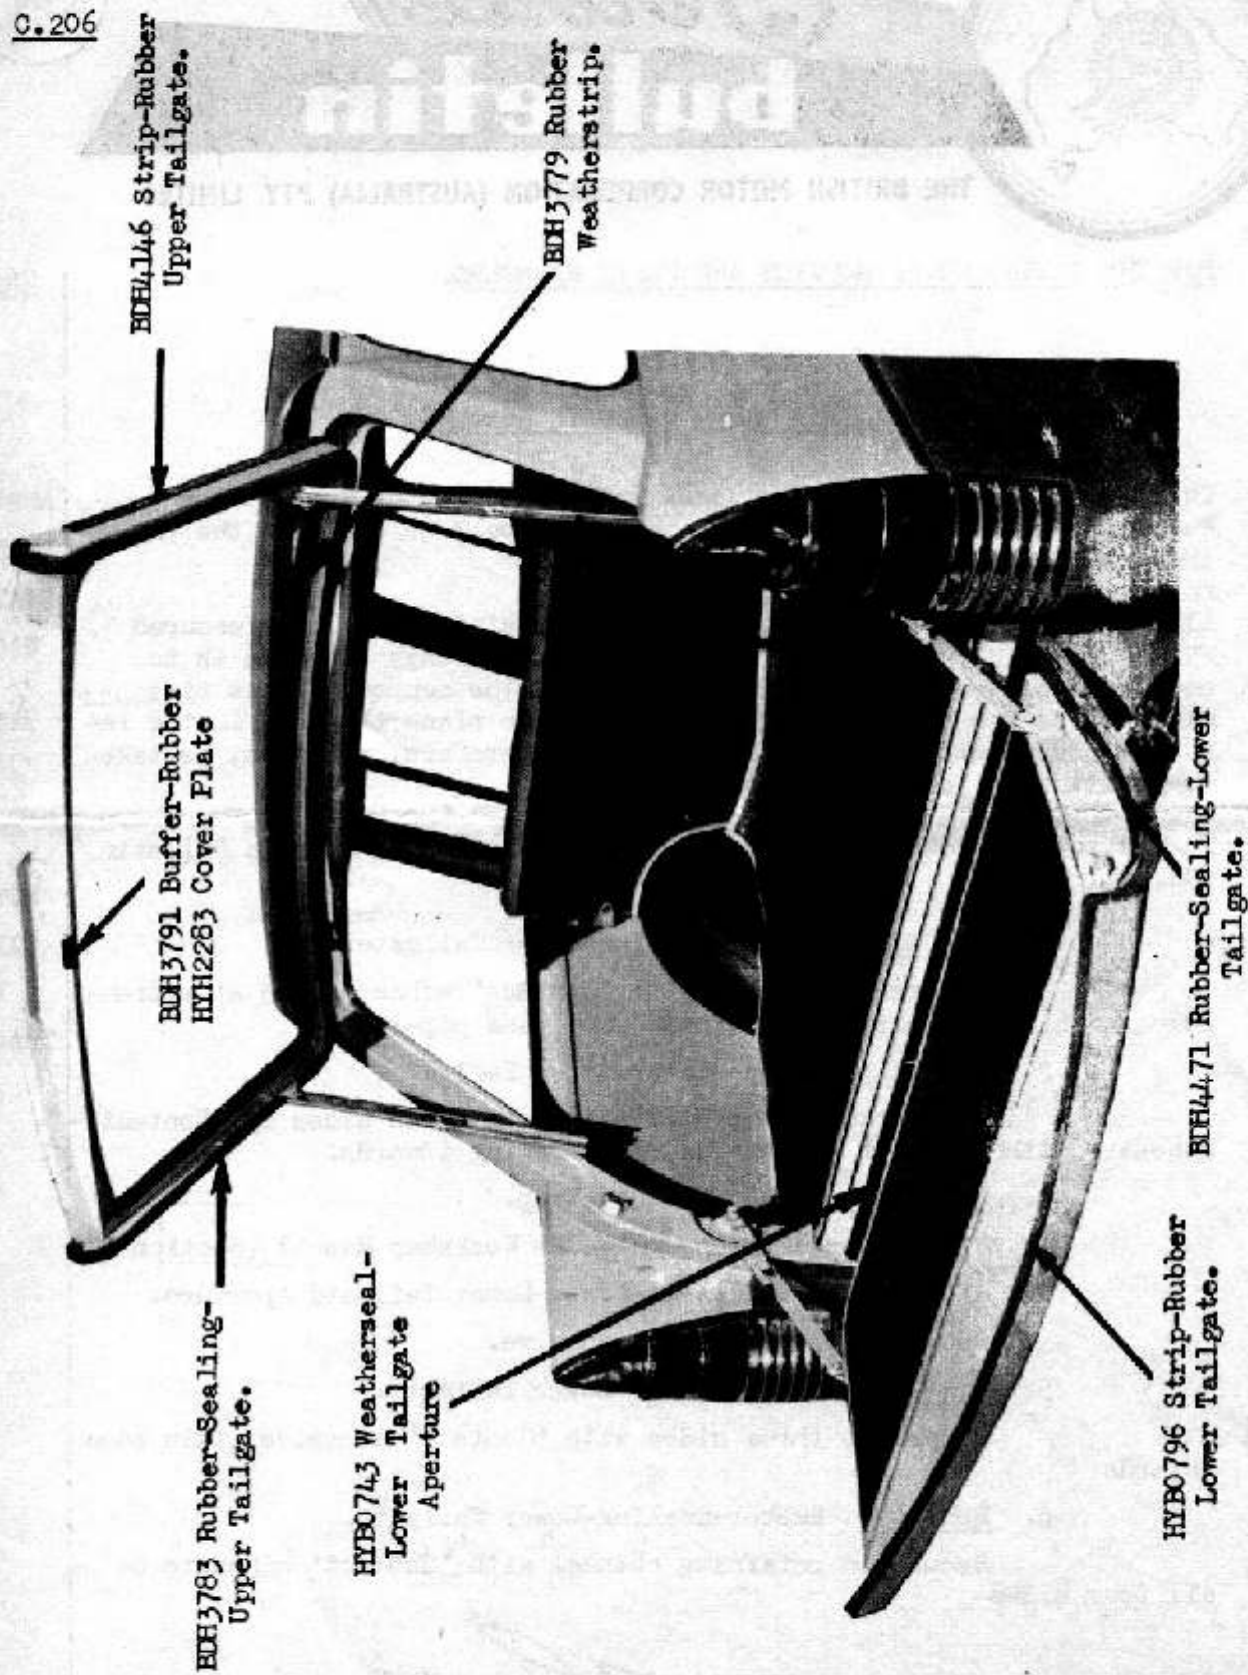

EDH4146 Strip-Rubber
Upper Tailgate.

EDH3779 Rubber
Weatherstrip.

EDH3791 Buffer-Rubber
HHH2283 Cover Flate

EDH3783 Rubber-Sealing-
Upper Tailgate.

HYB0743 Weatherseal-
Lower Tailgate
Aperture

HYB0796 Strip-Rubber
Lower Tailgate.

BHF4471 Rubber-Sealing-Lower
Tailgate.